


COTE 1 (REFERENCE)

180,500

1013,500

74,5

COTE 2

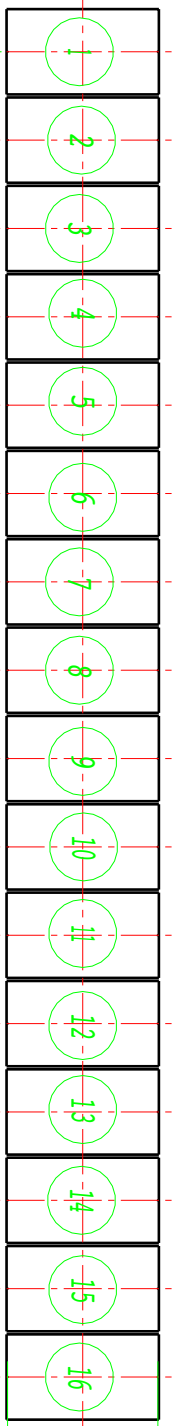

224,000

267,500

311,000

354,500

398,000

441,500

485,000

528,500

572,000

615,500

659,000

702,500


746,000

789,500

833,000

74,5 ENTRAXE MIRES

0,200

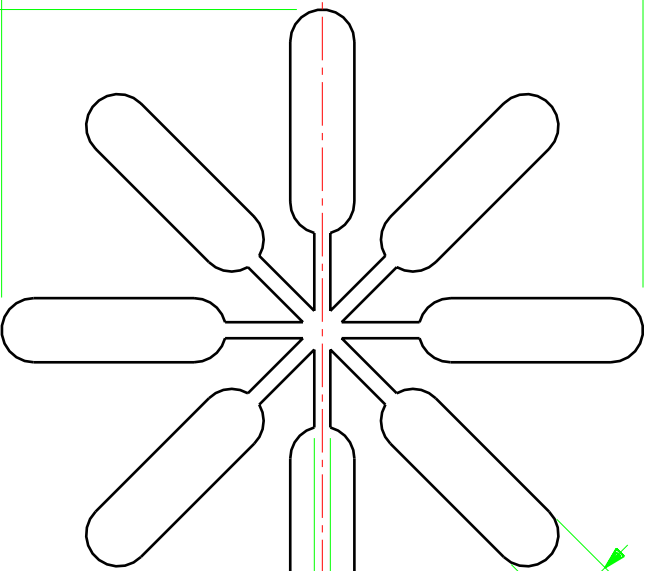


0,200

0,005

0,020

ATTENTION VERSION A  
74,5 au lieu de 74

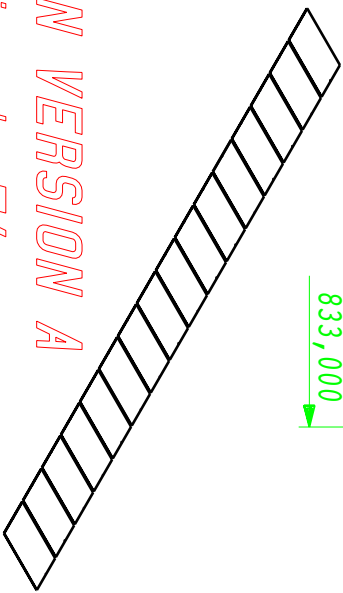

BASE DE DONNEES :

SSD, ETUDSTAR

Traitement :

Protection :

Matiere : / TOLERANCES GENERALES

RUGOSITE GENERALE

STAR

ASSEMBLAGE LADDER

POSITIONNEMENT DES MODULES

A 31.5.01 74,5 entraxe mires

Indice Date Modifications

Dessine G.Guilloux 3/5/01

Signature

SUBATECH IN2P3, EMN UNIVERSITE

ECOLE DES MINES 4 rue Alfred Kastler La Chantrerie 44070 NANTES Cedex 03 Tel 51 85 81 00 -Fax 51 85 84 79

Ech. /

0243DEF114